


Technical Document
Electric Vehicle Cable Armoured
3 x 6mm² + Cat 6A F/FTP SWA LSNH Black

webro

Part Number: 050102E-LSNH-SWA-BLK
Description: Electric Vehicle Cable 3 x 6mm² +
Cat 6A F/FTP SWA Low Smoke Non-Halogen Black

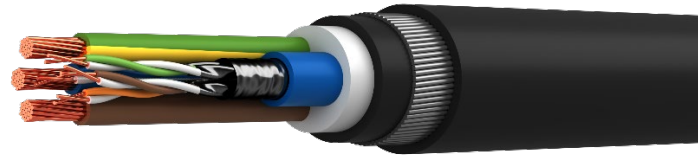

Product Construction

Data - Cat 6A F/FTP

Conductor Material	:	Bare Copper
Conductor Size	:	Solid, 23(1)awg
Insulation Material	:	Skin/Foam/Skin Polyethylene (SFSPE)
Number of Pairs	:	4
Pair Colours	:	Blue/White; Orange/White; Green/White; Brown/White
Common Drain Wire	:	Tinned Copper, 1/0.4mm
Screening 1	:	Ind. Aluminium Foil Screened Pairs, ≥ 100% Coverage
Screening 2	:	Overall Aluminium Foil, 100% Coverage
Sheath Material	:	Low Smoke Non-Halogen (LSNH)
Sheath Colour	:	Black



Power - 3 x 6mm²

Conductor Material	:	Bare Copper
Conductor Stranding	:	6mm ² , Class 2 to IEC 60228
Insulation Material	:	Cross Linked Polyethylene (XLPE)
Number of Cores	:	3
Core Colours	:	Blue, Brown, Green/Yellow

Overall Construction

Bedding Material	:	Low Smoke Non-Halogen (LSNH)
Armour	:	Steel Wire Armour (SWA)
Sheath Material	:	Low Smoke Non-Halogen (LSNH)
Sheath Colour	:	Black

Mechanical Characteristics

Overall Diameter	:	22.1mm ± 1.1mm
Temperature Range	Fixed	-20°C to +70°C
	Flexing	-5°C to +70°C
Bend Radius	:	12 x Overall Diameter
Weight	:	922 kg/km

Publication Date: 15/05/2023
Revision Number: 2.0
Written by: GB
Authorised by: GB

Webro Cables & Connectors Ltd


Vision House, Meadow Brooks Business Park, Meadow Lane, Long Eaton, Nottingham NG10 2GD, UK
Tel: +44 (0)115 9724483 | Fax: +44 (0)115 9461230 | sales@webro.com | www.webro.com

This technical document and its information and images are intended for guidance only. Due to technical improvements, manufacturing changes or commercial factors the product may vary, and we reserve the right without notice or liability to amend the product information.

Technical Document
 Electric Vehicle Cable Armoured
 3 x 6mm² + Cat 6A F/FTP SWA LSNH Black



Part Number: 050102E-LSNH-SWA-BLK
Description: Electric Vehicle Cable 3 x 6mm² +
 Cat 6A F/FTP SWA Low Smoke Non-Halogen Black

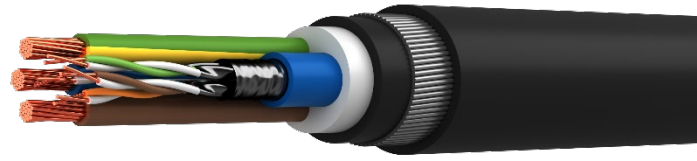

Electrical Characteristics

Data – Cat 6A F/FTP

Max. Conductor DC Resistance	:	≤ 9.5 Ω/km @ 20°C
Max. Resistance Unbalanced	:	< 2%
Max. Insulation Resistance	:	> 5000 MΩ x m
Mutual Capacitance	:	< 56 pF/m
Capacitance Unbalanced	:	1600 pF/km
Impedance @ 100 MHz	:	100 Ω ± 5
Velocity of Propagation	:	76 %
Delay Skew	:	< 25 ns / 100m
Voltage Rating	:	125V

Frequency (MHz)	Attenuation (dB/100m)	NEXT (dB)	PS – NEXT (dB)	ACR (dB)	PS – ACR (dB)	ACRF (dB)	PS-ACRF (dB)	Return Loss (dB)
1	≤ 2.0	≥ 95	≥ 92	≥ 90	≥ 87	≥ 100	≥ 97	25
4	≤ 3.6	≥ 95	≥ 92	≥ 90	≥ 87	≥ 100	≥ 97	25
10	≤ 5.4	≥ 95	≥ 92	≥ 85	≥ 82	≥ 90	≥ 87	28
100	≤ 18.3	≥ 87	≥ 84	≥ 75	≥ 72	≥ 75	≥ 72	25
200	≤ 25.0	≥ 87	≥ 84	≥ 75	≥ 72	≥ 70	≥ 67	25
250	≤ 29.1	≥ 85	≥ 82	≥ 52	≥ 49	≥ 65	≥ 62	23
400	≤ 37.4	≥ 75	≥ 72	≥ 41	≥ 48	≥ 55	≥ 52	23
500	≤ 41.5	≥ 75	≥ 72	≥ 30	≥ 27	≥ 55	≥ 52	21

Power – 3 x 6mm²

Conductor DC Resistance @ 20°C	:	≤ 3.08 Ω/km
Short Circuit Rating (1sec)	:	0.86kA
Current Rating	Direct in Ground :	69A
	In Duct :	56A
	In Air :	59A
Volt Drop Three Phase AC	:	6.8 mV/a/m
Test Voltage	:	3.5kV
Voltage Rating	:	0.6/1kV

Certifications & Standards

UV Resistance	:	ISO 4892-2 & ISO 4892-3
Flame Retardancy	:	BS EN 60332-1-2
Low Smoke	:	BS EN 61034-2
Halogen Gas	:	BS EN 60754-1&2
RoHS 3 Compliant	:	Yes
REACH Compliant	:	Yes
UKCA CPR Classification	:	Eca to BS EN 50575:2014+A1:2016

Publication Date: 15/05/2023
 Revision Number: 2.0
 Written by: GB
 Authorised by: GB

Webro Cables & Connectors Ltd

Vision House, Meadow Brooks Business Park, Meadow Lane, Long Eaton, Nottingham NG10 2GD, UK
 Tel: +44 (0)115 9724483 | Fax: +44 (0)115 9461230 | sales@webro.com | www.webro.com

This technical document and its information and images are intended for guidance only. Due to technical improvements, manufacturing changes or commercial factors the product may vary, and we reserve the right without notice or liability to amend the product information.