

Technical Document  
HYPOCLAMP F Slippery Fish Aerial Drop Cable  
Clamp for Flat Cables with 8 x 4mm OD

webro

Part No: 66-5129

Description: HYPOCLAMP F: Drop Clamp for Flat  
Cables with 8 x 4mm OD, PIA Approved

Product Construction

Body Material : Stainless Steel  
Shim : Stainless Steel  
Wedge : Plastic With Integrated Opening Bail

Characteristics

Maximum Cable Width : 8mm  
Maximum Cable Height : 4mm  
Weight : 40g

Certifications & Standards


PIA Approved : Yes  
Climatic Ageing Test : NF EN C-20-540  
Corrosion Test : NF EN 60068-2-52  
Tensile Test : Orange CCF/BI/BUBL  
Vibration Test : Orange CCF/BI/BUBL & NF EN 502589-3-13 with insertion loss of < 0.2dB

Features & Benefits

Easy, Quick & Tool-Less Installation  
Opening bail for installation in closed or opened hardware: cross-arms, hooks, brackets (min. Ø11mm)  
Installation without cable bending into the clamp  
Efficient gripping on most fibre optic drops due to the materials used

Installation Guide

Tension the cable to the required installation load  
Hang the clamp wedge onto the pole and wall hardware fitting and lock the bail  
Place the clamp body round the cable  
Position the shim onto the cable in the clamp body, with the gripping bumps facing the cable  
Pass the wedge in the large section of the clamp body the initiate the clamping onto the shim + cable  
For use where spans do not exceed 70m.

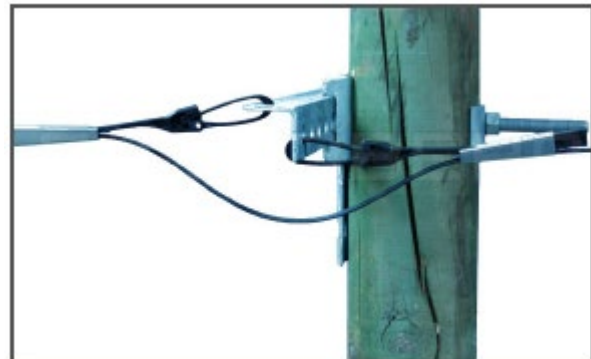

Publication Date: 06/10/2023  
Revision Number: 2.0  
Written by: GB  
Authorised by: GB

**Webro Cables & Connectors Ltd**

Vision House, Meadow Brooks Business Park, Meadow Lane, Long Eaton, Nottingham NG10 2GD, UK  
Tel: +44 (0)115 9724483 | Fax: +44 (0)115 9461230 | sales@webro.com | [www.webro.com](http://www.webro.com)

This technical document and its information and images are intended for guidance only. Due to technical improvements, manufacturing changes or commercial factors the product may vary, and we reserve the right without notice or liability to amend the product information.